

Ziba 6 & 12 Light Medium and Extra Large Chandelier

TC1186, TC11712 | 1.0

GENERATION LIGHTING CHANDELIER

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.


This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


Use minimum 90°C supply conductors.

SAVE THESE INSTRUCTIONS!

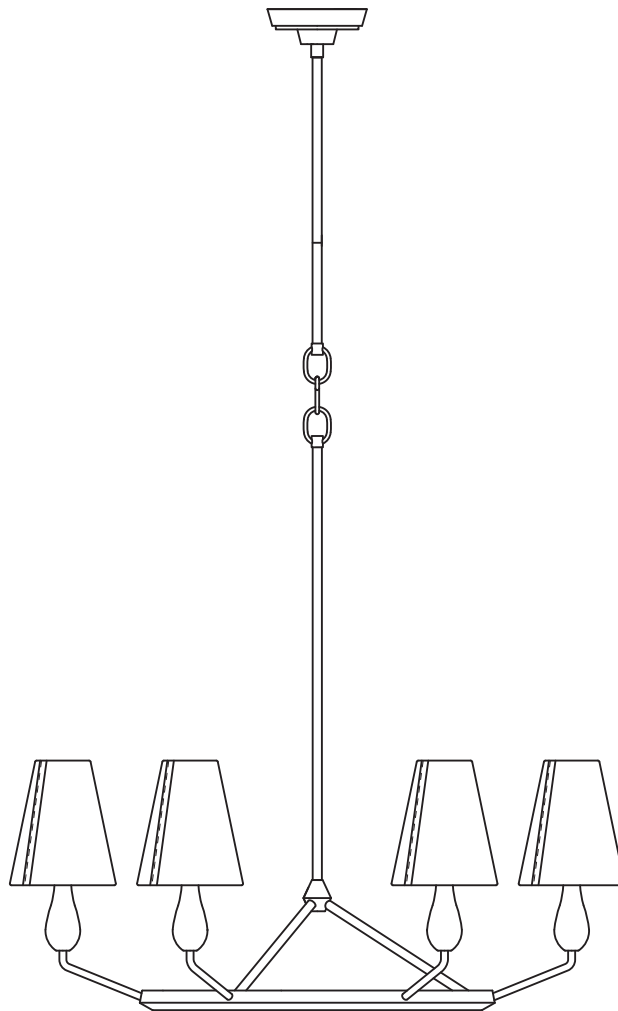

GENERATION LIGHTING
7400 Linder Ave., Skokie, IL 60077
T 847.410.4400 | F 847.410.4500
www.generationlighting.com

Install the Fixture

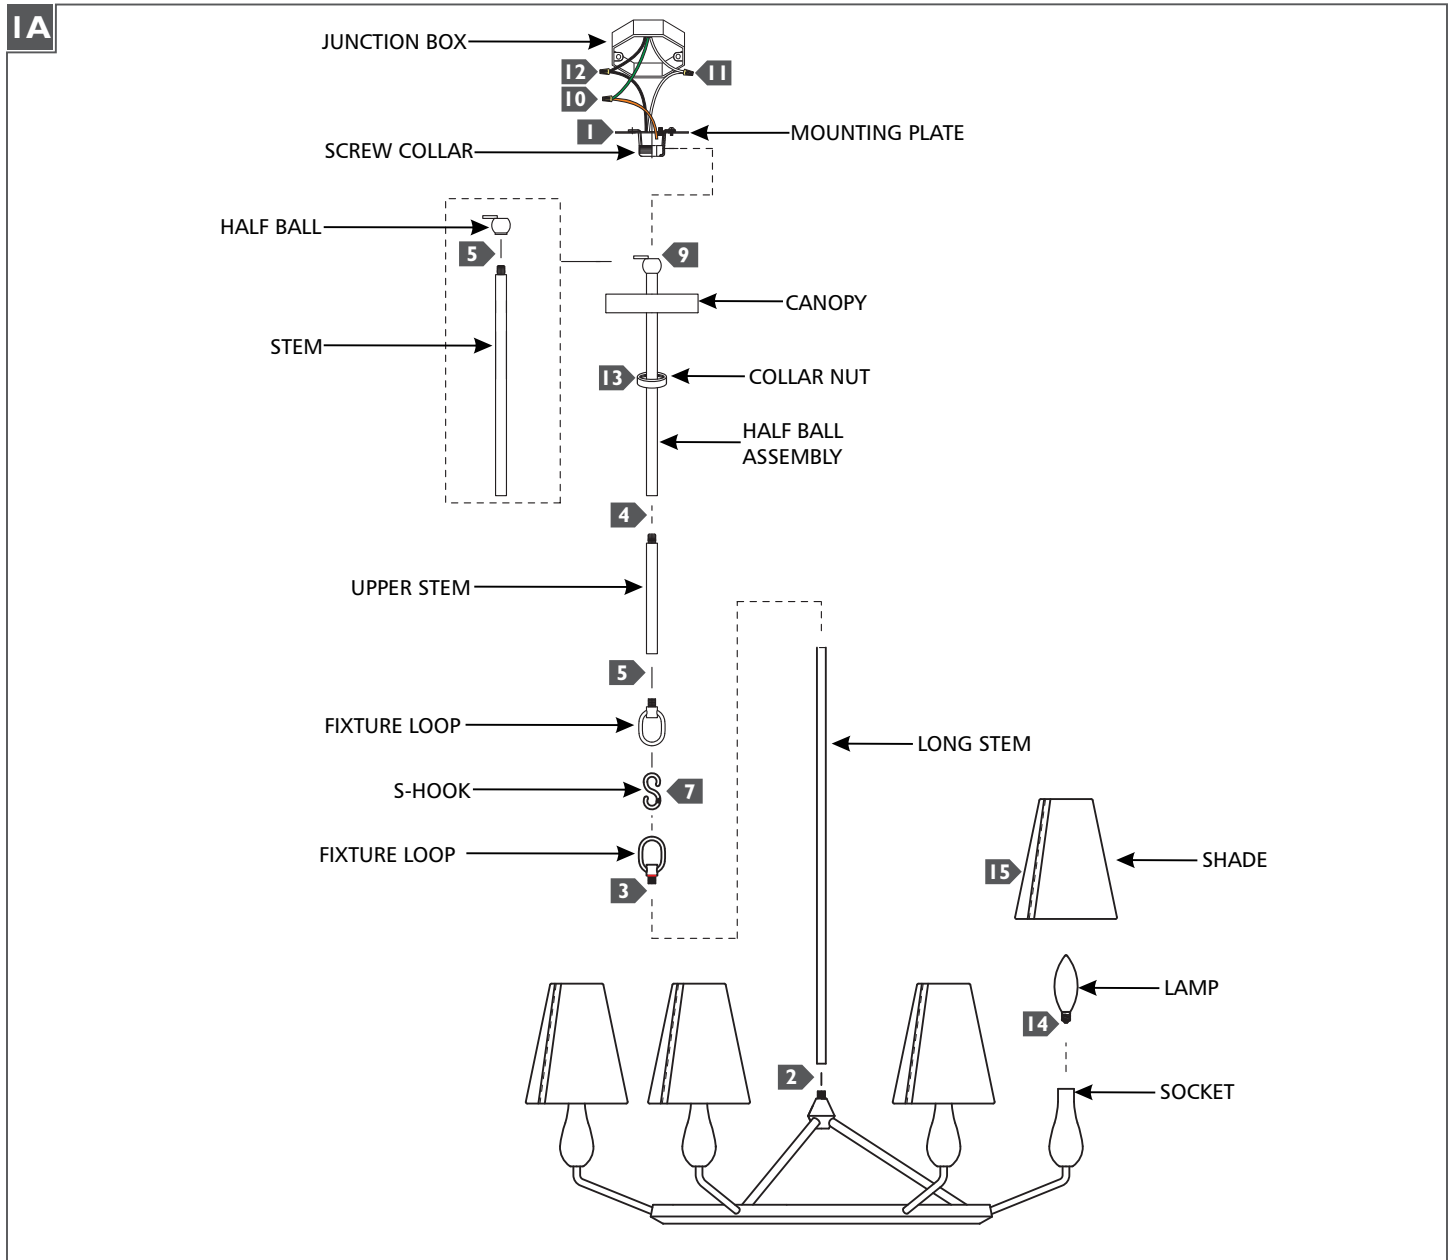

- 1 Secure the mounting plate to the junction box.
- 2 Feed the fixture wires through the long stem and screw it onto the fixture.
- 3 Feed the fixture wires through one of fixture loops, then screw it onto the long stem.
- 4 Determine the wanted height or look of the fixture with the provided stems, then assemble them by screwing them together.
- 5 Screw the half ball to the top of the stem assembly and the fixture loop to the bottom.
- 6 Slide the collar nut, then the canopy onto the upper stem assembly.
- 7 Connect the fixture assembly to the upper stem assembly from the fixture loops by using the S-hook.
- 8 Feed the fixture wires through the fixture loops and stem assembly.
- 9 Slide the half ball assembly onto the screw collar on the mounting plate.
- 10 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 11 Connect the white input driver wire to the neutral power line wire with a wire nut.
- 12 Connect the black input driver wire to the hot power line wire with a wire nut.
- 13 Neatly place all the wires and wire nut connections into the canopy/junction box, place the canopy onto the mounting plate and secure it in place by screwing the collar nut tightly onto the mounting plate.
- 14 Screw the lamps into the sockets. Refer to the label on the lamp socket for Max Wattage information.
- 15 Install the shades by carefully placing them onto the lamps.